

ACCO 8X4



IVECO

Your partner for sustainable transport

ACCO SPECIFICATIONS 8X4

CHASSIS DIMENSIONS (mm)

		8x4x4 AD C9 310/360 hp		
A	Wheelbase	5720	6300	6520
B	Overall length	9429	9744	9969
P	Front ground clearance	301	301	300
Q	Rear ground clearance	237	237	238
H	Front axle to front of body	560	560	560
	Turning circle* (kerb to kerb)	19210	20710	21320

*For wall to wall add 1600 mm

CAB DIMENSIONS (mm)

		8x4x4 AD C9 310/360 hp		
K	Unladen (6x4)	3010	3010	3010

SUSPENSION (mm)

		8x4x4 AD C9 310/360 hp		
C	Distance from FRA to bogie centre	697.5	697.5	697.5
D	Distance from RRA to bogie centre	697.5	697.5	697.5
L	Unladen	1009	1007	1008

MASS RATINGS

- GVM 28.5 tonnes

		8x4x4 AD C9 310/360 hp		
	Chassis mass front	6.0 tonnes*	6.0 tonnes*	6.0 tonnes*
	Chassis mass rear	2.8 tonnes*	2.8 tonnes*	2.8 tonnes*
	Chassis mass total	8.8 tonnes*	8.8 tonnes*	8.8 tonnes*

*Weights are to standard configuration and include: chassis cab or prime mover, with no driver or fuel.

ENGINE

310 hp (228kW) FPT Industrial Cursor 9 with Engine brake (EURO 6)
360 hp (265kW) FPT Industrial Cursor 9 with Engine brake (EURO 6)

Maximum Power:

228 kW (310 hp) @ 2200 rpm
265 kW (360 hp) @ 2200 rpm

Maximum Torque:

1300 Nm (310 hp) @ 1100 rpm
1650 Nm (360 hp) @ 1200 rpm

Emissions Technology: Hi-eSCR

Total Displacement: 8.7 litre (310 hp), 8.7 litre (360 hp)

Exhaust: Horizontal catalytic muffler with integrated Hi-eSCR catalyser

TRANSMISSION

6-speed full automatic transmission

Type: Allison Generation Five 3200 Series

Power Take Off: Chelsea/Parker with 0.93 ratio

Optional: Hydraulic Retarder

FRONT AXLE & SUSPENSION

IVECO 2 x 5890/D

Type: Forged steel I-beam

Capacity: 2 x 9.0 tonnes

Suspension Type: 2 leaf parabolic air suspension (Loadshare)

Capacity: 12.0 tonnes

REAR AXLE & SUSPENSION

Meritor MT23-150/D tandem single reduction


Capacity: 23.0 tonnes

Suspension Type: IVECO 8 bag with ECAS (Electronically Controlled Air Suspension) to control ride height

Differential: Driver controlled diff locks

REAR AXLE RATIO

		8x4x4 AD C9 310/360 hp
Standard/Default		5.67

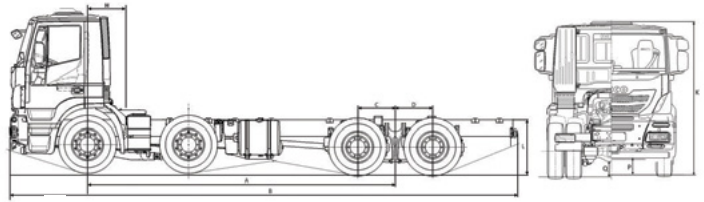

BRAKES

Type: EBS (Electronic Braking System), ESP (Electronic Stability Program), AEBS (Advanced Emergency Braking System), ABS (Anti-Lock Braking System), ASR (Anti-Skid Regulator) DBI (Direct Brake Integration), BAS (Brake Assistant System), BVR (Brake Lining Wear Adjustment)

Front / Diameter: Ventilated disc brakes / 432 mm

Rear / Diameter: Ventilated disc brakes / 432 mm

- Aluminium air tanks
- Wabco Air Dryer

FUEL SYSTEM

290 litre rectangular lockable aluminium tank (RHS) and 50 litre lockable AdBlue tank

CHASSIS

Type: 304.4 x 80 x 7.7 mm medium tensile steel channel

- Steel front bumper and driving lights, front LED DRL, LED rear lights
- FUPS
- 150A Chassis power supply for bodybuilder
- Heavy duty front towing pin

ELECTRICAL SYSTEM

Type: 24 Volt

Multiplex computerised CANBUS

Batteries: 2 x 170 Ah maintenance free with automatic isolation switch

Alternator: 28 Volt-90 A

Factory-installed telematics hardware including 12-month complimentary subscription

WHEELS & TYRES

Wheels: 8.25DC (drop centre) x 22.5 10-stud 335 mm PCD alloy wheels

Front Tyres: 295/80 R22.5

Rear Tyres: 11 R22.5

CAB CONSTRUCTION

- 2300 mm wide, ECE R29 compliant steel cab

SAFETY FEATURES

- Cruise control
- ACC (Adaptive Cruise Control)
- AEBS (Advanced Emergency Braking System)
- DRL (Daytime Running Lights)
- Downhill Cruise Control Gap
- Reverse buzzer
- Pneumatic horn on chassis
- Remote central locking
- Axle load indicator
- High visibility steps
- Optional:** Lane Departure Warning System (LDWS), Driver Style Evaluation (DSE), Driver Attention Support (DAS), Tyre Pressure Monitoring System (TPMS), Hydraulic Retarder

CAB FEATURES

- Driver seat: fabric covered, with head rest, seat belt, air suspended, heated
- Passenger seat: fabric covered, with head rest, seat belt and 2-way adjustment.
- Pneumatically controlled adjustable steering column
- 24 V and 12 V sockets
- 90° opening doors with electric windows
- Radio/CD MP3 player with Bluetooth and steering wheel controls
- Storage lockers and compartments above console and floor level
- Ecoswitch
- Engine idle cut off
- Engine Hour meter
- Fleet Management System Data Interface (FMS)
- Electric battery cutout
- PTO provision cab and chassis
- Manual A/C system
- Mechanical cabin suspension
- Manual cabin tilting
- Cup holder + storage box

Optional: Auto A/C system, Cabin air suspension, engine immobiliser, no engine idle cut off, IVECONNECT, Durabright finish alloy wheels, Xenon headlamps, headlamp washers, bulb rear lights, spare wheel, external sunvisor



iveco.com.au

IVECO

Your partner for sustainable transport

IVECO TRUCKS AUSTRALIA, LIMITED AB N: 86 004 045 061, PRINCES HWY DANDENONG, VICTORIA 3175 PO BOX 117 DANDENONG, VICTORIA 3175 TELEPHONE (03) 9928 2200 WWW.IVECO.COM.AU THE INFORMATION IN THIS DOCUMENT IS CORRECT AT THE TIME OF PRINTING. ALL WEIGHTS AND DIMENSIONS ARE APPROXIMATE ONLY IF AN EXACT WEIGHT OR DIMENSION IS REQUIRED PLEASE CONTACT YOUR LOCAL AUTHORIZED IVECO DEALER ALWAYS CONSULT AN AUTHORIZED IVECO DEALER FOR THE LATEST INFORMATION ON THE VEHICLE BEFORE DECIDING TO PLACE AN ORDER. OVERSEAS IMAGES ARE SHOWN THROUGHOUT THIS DOCUMENT. IMAGES IN THIS DOCUMENT MAY SHOW EQUIPMENT NOT INCLUDED IN THE STANDARD VEHICLE AND ARE SUBJECT TO AVAILABILITY. WE RESERVE THE RIGHT TO AMEND ANY PART OF THIS DOCUMENT WITHOUT NOTICE. IVE3007-AM8X4-03/2021.