# DAILY E6 TRADIE-MADE SPECIFICATIONS








# **DVITA E2** Specifications 45C SINGLE CAB CHASSIS

3173 Tray 4223 Tray

Dimensions (mm)		45C Single Cab Euro VI	
Α	Wheelbase	3000	3750
в	Overall Length	5418	6593
С	Front Overhang	1049	1049
D	Rear Overhang	1370	1795
Е	Overall Width (cab)	2010	2010
н	Front axle to front of body	1355	1355
к	Overall Height unladen	2279	2264
L	Frame height at end of frame unladen	765	768
Μ	Front Track width	1724	1724
Ν	RearTrack	1542	1542
Ρ	Front ground clearance	182	182
Q	Rear Ground Clearance	168	168
	Turning circle kerb to kerb	11116	13466
	Turning circle wall to wall	11730	14090

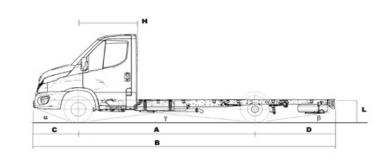











Mass (kg)			
GVM	4495	4495	
GCM	7995	7995	
Towing Capacity with braked trailer	3500	3500	
Front axle capacity	2100	2100	
Rear axle capacity	3400	3400	
Kerb mass front axle	1406	1444	
Kerb mass rear axle	695	691	
Kerb mass total	2101	2135	
Payload capacity	2168	2056	

Tray	<b>Dimensions</b>	(mm)	)
Internal width			

Internal width	2057	2057
External width	2218	2218
Internal length	3000	4050
Overall tray length	3173	4223
Internal load restraint points	10 per side	12 per side

# DAILY EE Specifications 45C DUAL CAB CHASSIS

Dimensions (mm)		45C Dual Cab Euro VI	
Α	Wheelbase	4100	
в	Overall Length	6993	
С	Front Overhang	1048	
D	Rear Overhang	1845	
Е	Overall Width (cab)	2052	
н	Front axle to front of body	2105	
к	Overall Height unladen	2661	
L	Frame height at end of frame unladen	759	
Μ	Front Track width	1724	
Ν	RearTrack	1542	
Ρ	Front ground clearance	182	
Q	Rear Ground Clearance	168	
	Turning circle kerb to kerb	14564	
	Turning circle wall to wall	15190	

4495

7995 3500

2100 3400

1580

763

2343

1864

2218 3750

3923

**3923 Tray** 2057

Mass (kg) GVM

Front axle capacity

Rear axle capacity Kerb mass front axle

Kerb mass rear axle Kerb mass total

Tray Dimensions (mm) Internal width

Payload capacity


External width


Internal length


Overall tray length


Towing Capacity with braked trailer

GCM

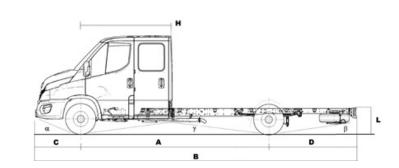

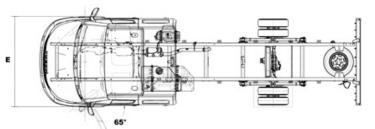









# DAILY Specifications 45C SINGLE & DUAL CAB

# Engine

180EVID FIC Euro 6 Heavy Duty engine with variable geometry turbine (VGT)

Maximum Output: 132 kW (180 HP) @ 3500 rpm Maximum Torque: 430 Nm (317 ft-lbs) @ 1500 rpm

**Emissions Technology:** Exhaust Gas Recirculation and Selective Catalytic Reduction

Total Displacement: 3.0 litre

**Exhaust:** Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

# Transmission

8-speed ZF Torque Converter Automatic (Hi-Matic 8HP70L) **Type:** 8HP70L. 1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1, 7th 0.839 -O.D. 8th 0.667 - D.O.D, rev. 3.297

# Steering

**Type:** Electric Power Steering (EPS)

 $\ensuremath{\textbf{Diameter:}}\xspace$  380 mm diameter steering wheel with tilt and telescopic adjustment

# Chassis

 $\ensuremath{\textbf{Type:}}\xspace C$  Section steel longitudinal side members and tubular cross members

# **Electrical System**

**Type:** 12V

Battery: I2V–II0 Ah (Smart-charging)

Smart Alternator: 12V-220 A

Trailer Wiring: Wiring to rear of chassis

## Safety

- **ESP9** includes ABS (Antilock Braking System), EBD (Electronic Brake force Distribution), ASR (Anti Slip Regulator), MSR (Motor Drag torque control) Hill Holder (Assisted uphill departure), HBA (Hydraulic Brake Assist), LAC (Load Adaptive Control), TSM (Trailer sway mitigation), RMI (Roll Movement Intervention), & ROM (Roll Over Mitigation)
- Four SRS airbags
- Advanced Emergency Braking System (AEBS)

### Wheels & Tyres

Wheels: Steel 5.5J x RI6

## Cabin Features

• Driver, passenger and curtain airbags with seat belt pretensioners

- · Suspended, heated and fully adjustable driver seat with armrest
- Suspended, heated and fully adjustable passenger seat with armrest (dual cab)

- Bench seat with two occupant capacity, under seat storage and fold down table (single cab)

- Second row seating for up to four passengers (dual cab models)
- Adaptive cruise control
- Electric windows

Exterior mirrors with integrated wide angle and direction

- indicators, heated and electronically adjustableOverhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- 2 cup and 2 bottle holders
- Air conditioning
- Electronic parking brake
- Ecoswitch Pro
- 2 spotlights
- 4 loud speakers

### Lights

• Daytime running lights

### Dashboard

• 3.5" TFT display and silver dial rings

• TFT Display Panel includes: digital speedometer, ADAS (Advanced Driver-Assistance Systems) dashboard, ADAS quick menu, oil, battery and service information. Navigation and phone multimedia, fuel economy, trip computer, vehicle settings, display settings and diagnostics.

Engine oil level display

• Hi-Connect Multimedia System - Apple CarPlay, Android Auto, DAB Radio, MP3 player, USB and AUX connectivity, Bluetooth with steering wheel controls

- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash


### **Security**

- Central locking with remote control
- Steering lock
- Engine immobiliser

### Fuel System

- 100 litres with fuel cap location on passenger side
- (70 litres on 3000mm wheelbase)
- 20 litre Adblue



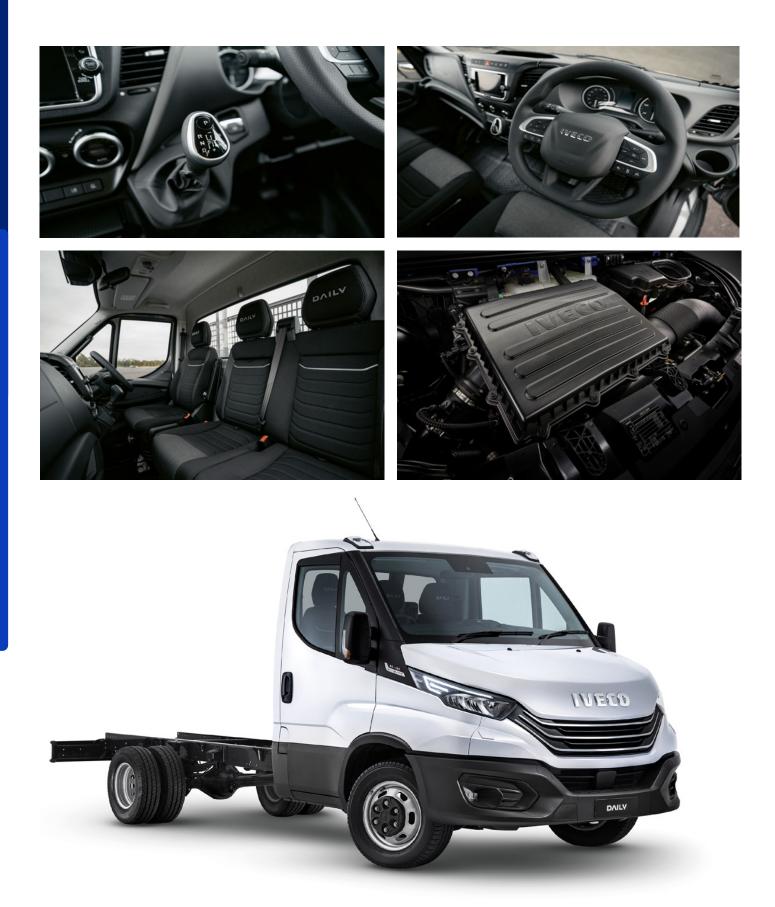



IVECO TRUCKS AUSTRALIA LIMITED ABN 86 004 065 061 LEVEL 10, 14 MASON STREET, DANDENONG, VICTORIA 3175; PO BOX 117 DANDENONG, VICTORIA 3175 TELEPHONE (03) 9238 2200 WWW.IVECO.COMAU THE INFORMATION IN THIS DOCUMENT WAS CORRECT AT THE TIME OF PRINTING. THE DATA IN THIS DOCUMENT IS APPROXIMATE. IF AN EXACT WEIGHT OR DIMENSION IS REQUIRED PLEASE CONTACT YOUR LOCAL AUTHORISED IVECO DEALER. ALWAYS CONSULT AN AUTHORISED IVECO DEALER FOR THE LATEST INFORMATION ON THE VEHICLE BEFORE DECIDING TO PLACE AN ORDER. OVERSEAS IMAGES ARE SHOWN THROUGHOUT THIS DOCUMENT AND IMAGES MAY REFER TO EQUIPMENT THAT IS OPTIONAL. THE MODELS DESCRIBED CAN BE SUBJECT TO MODIFICATIONS WITHOUT ANY NOTICE BY THE MANUFACTURER 11/2023.